

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 852 188 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:

08.07.1998 Bulletin 1998/28

(51) Int Cl.<sup>6</sup>: B60G 15/14

(21) Application number: 98300026.6

(22) Date of filing: 05.01.1998

(84) Designated Contracting States:

AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 06.01.1997 US 779875

26.11.1997 US 979004

(71) Applicant: THE GATES CORPORATION  
Denver, Colorado 80209 (US)

(72) Inventors:

- Crabtree, Michael L.  
Arvada, Colorado 80003 (US)
- Stieg, Richard F.  
Boulder, Colorado 80303 (US)

(74) Representative: Carpmael, John William Maurice  
CARPMAELS & RANSFORD  
43 Bloomsbury Square  
London, WC1A 2RA (GB)

## (54) Side load compensating airspring for a vehicle suspension and method

(57) A telescopic strut (10) for a vehicle suspension of the airspring type with a flexible sleeve (20) forming a chamber portion (A-B, A'-B') and a rolling lobe portion (B-C, B'-C'). The chamber portion is attached to a tilted closure (14) and the rolling lobe portion of the airsleeve is attached to a piston (18) that is transversely moved which introduces a shear force (FT) into the airsleeve and increases a surface area on an upward tilted side of the sleeve so as to provide side load compensation and where the axial length of the rolling lobe is substantially equalized to enhanced flexural life.

A method of imparting a side load force with an airspring fastened between a fixed member (12) and reciprocating member (16) of a vehicle suspension, is provided by tilting a closure member (14) of the airspring, transversely moving a piston (18) connected to a rolling lobe portion of the airspring while distorting a chamber portion of the airspring, and eccentrically offsetting the piston in a manner that tends to equalize an axial length of a rolling lobe.

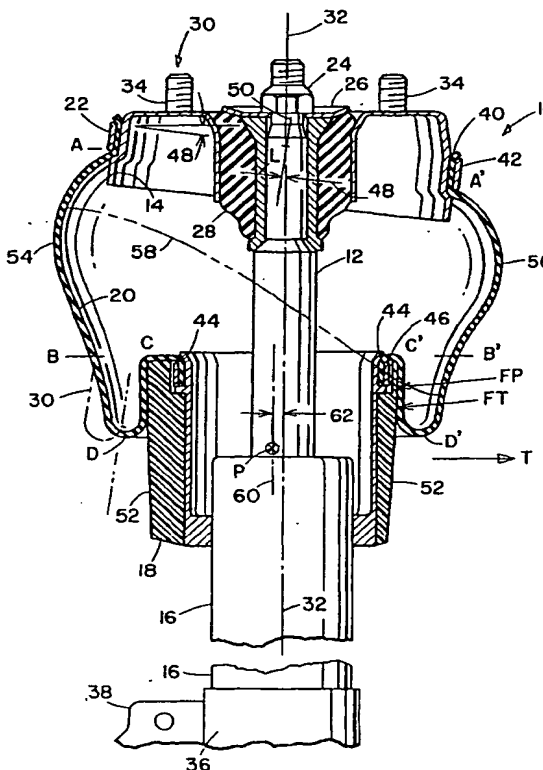


FIG. 1

## Description

The invention generally relates to strut type suspension members for vehicles, but more particularly, the invention relates to a strut with an airspring having a sleeve with a flexible wall including a rolling lobe between telescoping members, but more particularly, the invention relates to a strut with an airspring arranged to provide side load compensation while simultaneously providing a sleeve arrangement that gives a rolling lobe an acceptable flexural life, and a method for imparting a side load force to a vehicle suspension.

A strut of a vehicle suspension is typically oriented at an angle in relation to a reciprocal movement of a suspension for a wheel. The angular arrangement of the strut introduces a bending moment or torque into the telescoping members of the strut. Should such a moment be not countered or compensated with an opposite moment, it causes telescoping members of the strut to bind and results in vehicle ride harshness and reduced life of the strut. An opposite bending moment introduced into a strut is generally referred to in the industry as "side load compensation".

Airspring configurations have been disclosed with geometries that provide a compensating moment or side load compensation in a telescoping strut to oppose the moment placed on the strut by a vehicle suspension system. Examples of such airspring configurations for telescoping struts are disclosed in US Patent No. 4,688,774 to Warmuth, and divisional patent thereof, No. 4,911,416. The claimed feature of Warmuth '416 pertains to a tubular flexible member (airspring sleeve) with an end cut in a non-perpendicular plane and which end forms a rolling lobe of the airspring. In FIGS. 1 and 2 of Warmuth and herein exemplified by FIG. 2 the so formed rolling lobe Y-Z, Y'-Z' is of unequal length W-Z, W-Z' when pressed against a rolling lobe surface of a piston of the airspring. The unequal axial length lobe results in a differential area where the force on one side of the piston (i.e. the inboard side of the strut) is greater than the force on the opposite side of the piston (i.e. the outboard side of the strut) causing some degree of side load compensation that counters a moment introduced into the strut by the suspension system. The asymmetry of unequal axial lobe length introduces a problem which is a substantially shortened flexural cycle life of the lobe (e.g. less than 100,000 cycles).

Another problem that an airspring sleeve with a non-perpendicular cut end introduces is that it defines a chamber where the surface area on the outboard side may be less than an inboard side because the sleeve length X'-W on the outboard side is less than the sleeve length X-W on the inboard side as shown in FIG. 2. The unequal sleeve lengths X'-W, X-W results in a differential surface area in the chamber portion that causes a negative side load force which is counteractive to the side load force desired from the unequal axial length rolling lobe. In FIG. 3 the length of the sleeve forming the

rolling lobe portion Y-Z, Y'-Z' is less than the sleeve length that forms the chamber portion X-Y, X'-Y'. However, in FIGS. 5-7 of Warmuth '416 (and herein exemplified by FIG. 3), the chamber portion is substantially formed along length R-S, R'-S' by a metal can. That part of the sleeve length which forms the rolling lobe portion S-T, S'-T' is substantially greater than that part of the sleeve which connects to the can. Consequently, there is very little sleeve length S-U available to form part of the chamber portion.

In Warmuth '774, FIGS. 5-7, an airspring with a piston eccentrically located in relation to a center line for a strut is disclosed in conjunction with a rolling lobe of unequal axial length. While the unequal length rolling lobe provides some side load compensation, the unequal length lobe is detrimental to lobe life as, above discussed. In Warmuth FIG. 6, the lobe on the outboard side of the strut is greater in length than that of the lobe on the inboard side which, under Warmuth FIG. 3, imparts negative side load compensation (i.e. in the wrong direction). Also, in FIG. 6, the closure member attaching an end of the sleeve to the can is tilted clockwise while an axis of the sleeve faces toward the inboard side; a free length of the sleeve to where it bends at the rolling lobe has substantially the same projected length on both sides of the piston. Consequently, a difference in the free length of the sleeve per se on the inboard and outboard side is not available to define a differential area that may contribute to a side load compensation.

In FIG. 7 of Warmuth '774 (herein exemplified by FIG. 3), an airspring with rolling lobes of unequal axial lengths is shown. The rolling lobe length T-U against the piston on the inboard side is longer than the length T'-U' of the rolling lobe against the piston on the outboard side which, according to the teaching of Warmuth, provides side load compensation with a clockwise moment. One end of the sleeve is attached to a can that primarily forms a chamber of the airspring and where the closure member attaching and end of the sleeve to the can ring is tilted counterclockwise. The free length S-U of the sleeve to the formation of the rolling lobe on the inboard side is substantially longer than the free length S'-U' of the sleeve of the rolling lobe on the outboard side of the sleeve. The difference in length creates a surface area that is larger on the inboard side which also has a compensating moment which in this case is counterclockwise. Warmuth '774, does not consider any impact that the differential surface area has on side load compensation. The effect of differential surface area may completely offset or negate that side load compensation realized by the effect of a rolling lobe having unequal axial lengths.

Another airspring type strut with side load compensation is disclosed in US Patent No. 4,712,776 to Geno. As shown in FIG. 2 of Geno, an airspring has lobes of unequal axial lengths. The unequal length lobes have a detrimental impact on flexural life as above discussed in reference to Warmuth. In Geno, side load compensa-

tion is generated by means of a rigid member located inboard and attached to a can or canister portion that forms part of the airspring. The member restricts an outward expansion of the flexible sleeve on the inboard side. The sleeve exerts a pressure on the member which results in force on the strut to counteract lateral forces acting on the strut so as to provide a side load compensating moment. The sleeve and piston are arranged coaxially with the center line of the strut, and the canister forms a part of the operating volume for the airspring member.

US Patent No. 4,763,883 to Crabtree discloses another example of a strut at FIG. 13 where an airsleeve is oriented coaxial with the longitudinal axis of a strut. The airsleeve forms a chamber having a substantially larger diameter than that of the rolling lobe portion of the sleeve. However, Crabtree does not disclose a strut having a means for providing side load compensation.

### Summary of the Invention

In accordance with the invention, a side load compensating airspring strut is provided.

The strut has a flexible airspring sleeve with a chamber portion connected at a closure member that is tilted at an angle in relation to a longitudinal axis of the strut. A rolling lobe portion of the airsleeve is attached to a piston that is transversely moved toward the axis of the strut, which introduces a sheer force into the chamber portion of the sleeve and increases the surface area on one side of the sleeve while decreasing a surface area on a diametrically opposed side of the sleeve. The tilted closure member, change in sleeve surface area and shear force result in a side load compensation that is imparted to the strut. The airspring has a piston with a rolling lobe surface that is eccentrically offset in an amount that tends to equalize an axial length of the rolling lobe for durability.

A method of imparting a side load force with an airspring fastened between a fixed member and reciprocating member of a vehicle suspension, is provided by tilting a closure member of the airspring, transversely moving a piston connected to a rolling lobe portion of the airspring while distorting a chamber portion of the airspring, and eccentrically offsetting the piston in a manner that tends to equalize an axial length of a rolling lobe.

An object of the invention is to provide an airspring strut having side load compensation but where the flexural life of a rolling lobe is not substantially comprised by an unequal axial length of the rolling lobe against a piston.

This and other objects or advantages of the invention will be apparent after reviewing the drawings and description thereof wherein:

Figure 1 is a partially cut-away axial cross-section of a prior art airspring strut; and

Figure 2 is a partially cut-away axial cross-section of a prior art airspring strut; and

Figure 3 is a partially cut-away axial cross-section of a prior art airspring strut.

### Description of Preferred Embodiment

Referring to FIG. 1, a telescopic suspension strut 10 of the airspring type is provided for use with a vehicle suspension system not shown. This strut is of the type with a fixed member 12, a closure member 14 attached to the fixed member, a reciprocating member 16 that includes a hydraulic damping system (not shown), a piston 18 attached to the reciprocal member, and a flexible sleeve 20 connected between the closure member 14 and piston 18. The fixed member 12 is attached to the closure member 14 which may be in the form of a canister having any desired shape, such as a "tube-pan" shape as shown with a cylindrical surface 22 for attachment to the flexible sleeve 20. The closure member 14 attaches to the fixed member of the strut by way of a fastener 24, a washer 26, and a grommet 28. Optionally, the closure member may incorporate a bearing assembly (not shown) which permits the strut to be rotated about its longitudinal axis 32 for steering a vehicle. The closure member may be attached to a vehicle by means of threaded fasteners 34.

The reciprocating member has an end 36 that attaches at an outboard side 38 to a reciprocating part of a vehicle suspension system (not shown). The flexible sleeve is of the elastomeric type that is reinforced with embedded textile cords. The flexible member may have any desired construction but preferably, has a construction of the type as disclosed in US Patent No. 4,763,883 to Crabtree where the cords are disposed at opposite helical angles, and more preferably, where the airsleeve is contoured as taught by Crabtree.

The flexible sleeve 20 has a chamber portion A-B, A'-B' with an end 40 connected at the cylindrical surface 22 of the closure member 14 by means of a ring 42 that may be crimped or swaged so as to clamp end 40 to the closure member.

The flexible sleeve 20 has a rolling lobe portion B-C, B'-C' that is connected at an end 44 to the piston 18 by means of a ring 46 which may be crimped or swaged so as to clamp the end 44 to the piston. Preferably, the ring 46 has an axis that is concentric with the longitudinal axis 32 of the strut which helps to equalize an axial length of the rolling lobe as hereinafter set forth.

Closure member 14 is tilted at an angle 48 in relation to the longitudinal axis 32 of the strut whereby an axis 50 for the cylindrical surface 22 and connected end 40 of the sleeve is directed toward an outboard side of the strut.

Left unconstrained, the rolling lobe B-C, B'-C', would take a free position such as along dotted line 30 toward the outboard side of the strut. The piston is transversely moved and rotated about a transverse axis P

from such a free position and in a direction T. The movement is resisted by the flexible member which introduces a shear force into the flexible sleeve that is reacted as a force FT against a rolling lobe surface 52 of the piston.

The tilted closure member in conjunction with the transversely moved piston distorts the chamber portion A-B by increasing its surface area 54 on an upward tilted side of the chamber portion, and distorting a diametrically opposed downward tilted side of the chamber portion A'-B' by decreasing its surface area 56 which results in a differential surface area that is larger on the outboard side of the flexible sleeve. It is theorized that the larger surface area under pressure causes a few cords of the imbedded reinforcement to have a slightly higher tension so as to pull along their length as shown by phantom line 58 so as to effectively pull against the piston generating some force FP.

Preferably, ends 40 and 44 of the flexible member are cut in a plane substantially perpendicular to the longitudinal axis of the sleeve. With such a cut and a symmetrical, co-axial rolling lobe surface, the rolling lobes would have unequal axial lengths. It has been determined that while unequal axial length lobes would provide some side load compensation, the unequal lengths are detrimental to the flexural life of the lobe. Preferably, the piston has a rolling lobe surface 52 eccentrically offset in a direction generally facing the side of the flexible sleeve with the increased surface area (i.e. outboard side) where the rolling lobe surface is offset by moving a longitudinal axis 60 of the piston an amount 62 so as to substantially equalize the axial lengths C-D, C'-D' of the rolling lobe. The ring 44 when concentric with the longitudinal axis 32 of the strut, helps in equalizing the axial length of the rolling lobe.

The number of degrees that the closure member is tilted has an impact on side load compensation. The greater the angle, the greater the side load compensation. It is preferred that the closure member be tilted at an angle from about 3 to about 20 degrees. The tilt in angle in combination with the translation of the piston member causes the flexible sleeve to distort. By empirical testing, it has been determined that the change in surface area ranges from about 1 to 15 percent as the closure member is tilted from about 3 to 20 degrees.

Generally, square cut cylindrical sleeves of the type exemplified by FIGS. 2 and 3 will not permit a tilting of the closure member beyond about 7 degrees. For this reason, flexible sleeves of the Crabtree type (US Patent No. 4,763,883) are preferred where the chamber portion may have an inside diameter that is at least from about 1.1 to about 1.5 times the maximum inside diameter of the rolling lobe portion. The increased diameter of the chamber portion permits the closure member to be tilted up to 20 degrees without the piston contacting the flexible member as the piston reciprocates into the chamber.

To illustrate the features of the invention, an air-

spring strut was constructed with a airsleeve having a chamber portion length of 85mm, a chamber portion diameter of 200mm, and a rolling lobe surface diameter of 150mm. The closure member was tilted at 7.0 degrees which resulted in a differential surface area between the outboard and inboard side of the sleeve of approximately 10 percent. The rolling lobe surface of the piston was eccentrically offset 4mm and arranged so that its axis was substantially parallel to the axis of the strut. The so constructed airspring, when measured empirically, exhibited a side load force of 750 Newtons (170 lbs) when the airsleeve was pressurized to 480kpa (70psi). The airspring demonstrated a flexural life greater than 500,000 cycles.

The foregoing detail description is used for purpose of illustration only and is not intended to limit the scope of the invention which is to be determined from the appended claims.

## Claims

1. A telescopic suspension strut (10) with a fixed member (12) and a reciprocating member (16) and of the type for providing a side load compensating force, the strut with a flexible sleeve (20) having (1) a chamber portion (A-B, A'-B') connected at an end (40) to a closure member (14) that is attached to the fixed member (12) and (2) a rolling lobe portion (B-C, B'-C') connected at an end (44) to an eccentrically offset piston (18) that is attached to the reciprocating member (16), the sleeve (20) of the elastomeric type reinforced with embedded textile cords and having a length that forms the chamber portion (A-B, A'-B') that is greater than a length that forms the rolling lobe portion (B-C, B'-C'), wherein the improvement comprises:

the chamber portion (A-B, A'-B') connected to a closure member (14) that is tilted at an angle (48) in relation to a longitudinal axis (32) of the strut;

the rolling lobe portion (B-C, B'-C') connected to a piston (18) that is transversely moved from a free position (30) and in a direction toward the longitudinal axis (32) of the strut which (1) induces a shear force (FT) into the flexible sleeve and (2) distorts the chamber portion by increasing a surface area (54) on an upward tilted side of the chamber portion (A-B) and decreasing a surface area on a diametrically opposed, downward tilted side of the chamber portion (A'-B') resulting in a differential surface area;

the piston (18) having a rolling lobe surface (52) eccentrically offset in a direction generally facing the side of the chamber portion of increased

surface area, the rolling lobe surface offset an amount (62) that tends to equalize an axial length (C-D, C'-D') of the rolling lobe portion (B-C, B'-C') around the rolling lobe surface (52) of the piston; and

wherein, reaction to the tilted closure member (14), differential surface area and shear force (FT) results in a side load compensation imparted to the strut (10).

2. The suspension strut as claimed in Claim 1 wherein the closure member (14) is tilted at an angle (48) from about 3 to 20 degrees.
3. The suspension strut as claimed in Claim 1 wherein the surface area of the upward tilted side of the chamber portion (A-B) is from about 1 to 15 percent greater than the surface area of the downward tilted side of the chamber portion (A'-B').
4. The suspension strut as claimed in Claim 1 wherein the rolling lobe surface (52) of the piston (18) is eccentrically offset (62) from about 1 to 10mm.
5. The suspension strut as claimed in Claim 1 wherein the end (44) that connects the rolling lobe portion to the piston (18) is cut in a plane substantially perpendicular to a longitudinal axis of the sleeve.
6. The suspension strut as claimed in Claim 1 wherein the end (40) that connects the chamber portion (A-B, A'-B') to the closure member (14) is cut in a plane substantially perpendicular to a longitudinal axis (50) of the sleeve.
7. The suspension strut as claimed in Claim 1 where a maximum inside diameter of the chamber portion (A-B, A'-B') is at least from about 1.1 to 1.5 times a maximum inside diameter of the rolling lobe portion (B-C, B'-C').
8. The suspension strut as claimed in Claim 1 wherein a longitudinal axis (60) of the piston (18) is substantially parallel to the longitudinal axis (32) of the strut.
9. The suspension strut as claimed in Claim 1 wherein the axis (60) of the piston is rotated about a transverse axis (P) an opposite angle substantially equal in degrees to the tilted angle (48) of the closure member.
10. The suspension strut as claimed in Claim 1 wherein the end (44) of the rolling lobe portion is connected to the piston with a ring (46) that is substantially concentric with the longitudinal axis (32) of the strut.
11. A method of providing a side load force between a

fixed member (12) and reciprocating member (16) with an airspring of the type with a flexible sleeve (20) having (1) a chamber portion (A-B, A'-B') connected at an end (40) to a closure member (14) attached to the fixed member (12) and (2) a rolling lobe portion (B-C, B'-C') connected at an end (44) to an eccentrically offset piston (18) that is attached to the reciprocating member (16), wherein the improvement comprises the steps of:

tilting the closure member that is connected to the chamber portion to an angle (48);

transversely moving from a free position (30), a piston (18) that is connected to the rolling lobe portion (B-C, B'-C') while simultaneously distorting the chamber portion (A-B, A'-B');

eccentrically offsetting the piston (18) and attached rolling lobe portion (B-C, B'-C') while tending to equalize an axial length (C-D, C'-D') of the rolling lobe portion (B-C, B'-C') around a rolling lobe surface (52) of the piston (18); and

imparting a side load force between the fixed member (12) and reciprocating member (16) by tilting the closure member, distorting the chamber portion and eccentrically offsetting the piston.

12. The method as claimed in Claim 11 including the step of tilting of the closure member (14) at an angle from about 2 to 20 degrees.
13. The method as claimed in Claim 11 including the step of eccentrically offsetting (62) the rolling lobe surface (52) of the piston (18) from about 1 to 10 mm.
14. The method as claimed in Claim 11 including the steps of forming the chamber portion (A-B, A'-B') to have a maximum inside diameter and forming the rolling lobe portion (B-C, B'-C') to have a maximum inside diameter such that said diameter of the chamber portion is from about 1.1 to 1.5 times said maximum diameter of the rolling lobe portion.
15. The method as claimed in Claim 11 including the step of rotating the piston (18) about a transverse axis (P) an angle substantially opposite and equal in degrees to the angle that the closure member (14) is tilted.
16. A vehicle suspension with an airspring attached between a fixed member (12) reciprocating member (16), airspring with a flexible sleeve (20) having (1) a chamber portion (A-B, A'-B') connected at an end (40) to a closure member (14) that is attached to the

fixed member (12) and (2) a rolling lobe portion (B-C, B'-C') connected at an end (44) to an eccentrically offset piston (18) that is attached to the reciprocating member (16), the sleeve (20) of the elastomeric type reinforced with embedded textile cords, wherein the improvement comprises:

the chamber portion (A-B, A'-B') connected to a closure member (14) that is tilted at an angle (48);

the rolling lobe portion (B-C, B'-C') connected to a piston (18) that is transversely moved from a free position 30 which distorts the chamber portion (A-B, A'-B');

the piston (18) having a rolling lobe surface (52) eccentrically offset an amount (62) that tends to equalize an axial length (C-D, C'-D') of the rolling lobe portion (B-C, B'-C') around the rolling lobe surface (52) of the piston; and

wherein, reaction to the tilted closure member (14), distorted chamber portion and transversely moved piston, results in a side load force.

17. The vehicle suspension as claimed in Claim 16 wherein the closure member (14) is tilted at an angle (48) from about 3 to 20 degrees.


18. The vehicle suspension as claimed in Claim 16 wherein the rolling lobe surface (52) of the piston is eccentrically offset (62) from about 1 to 10mm.

19. The vehicle suspension as claimed in Claim 16 where a maximum inside diameter of the chamber portion (A-B, A'B') is at least from about 1.1 to 1.5 times a maximum inside diameter of the rolling lobe portion (B-C, B'-C').


20. The vehicle suspension as claimed in Claim 16 wherein the piston (18) is rotated about a transverse axis (P) an opposite angle substantially equal in degrees to the tilted angle (48) of the closure member (14).

50


55

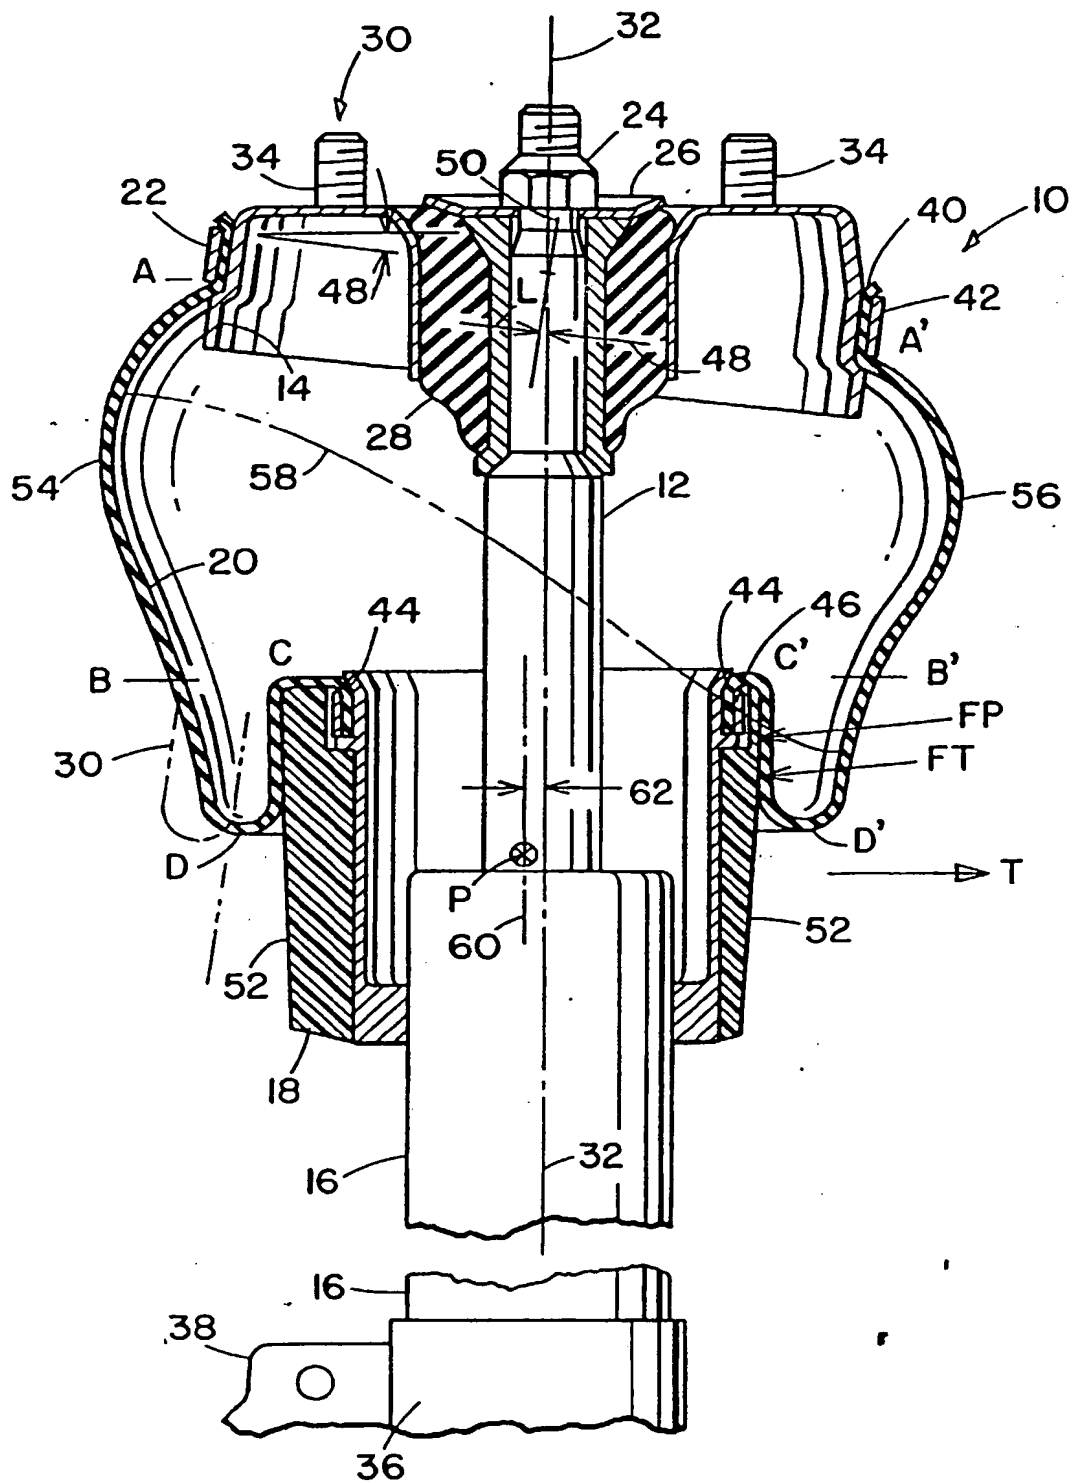

**FIG. 1**

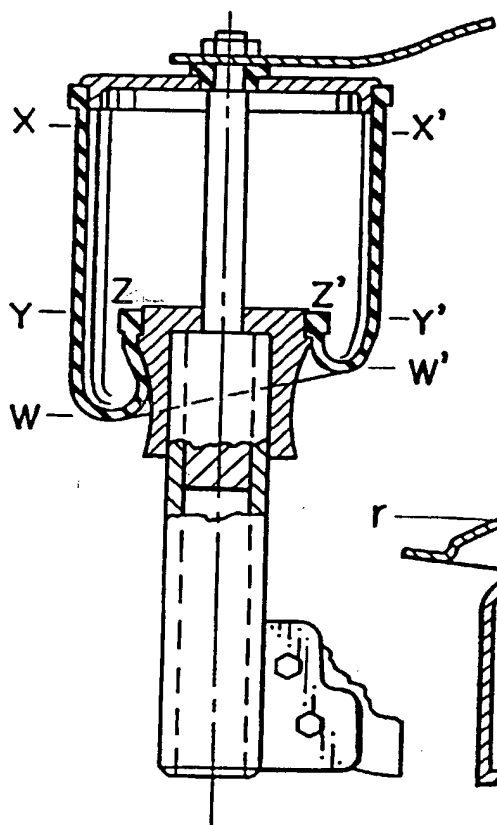


**FIG. 2**  
(PRIOR ART)

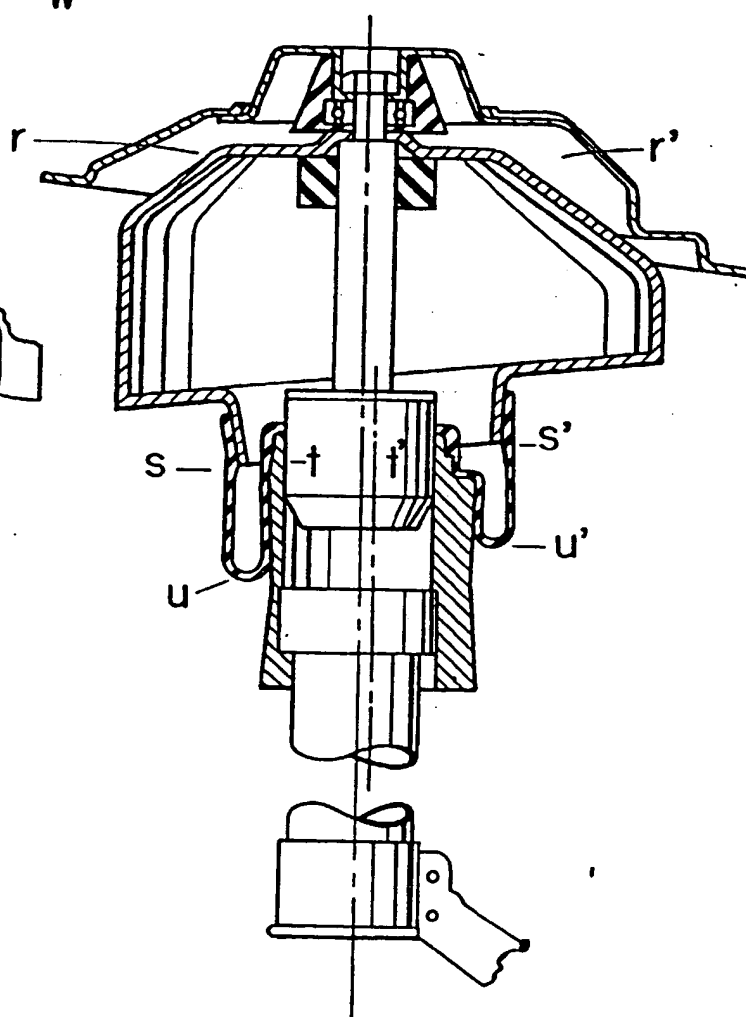

**FIG. 3**  
(PRIOR ART)





Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 852 188 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
13.09.2000 Bulletin 2000/37

(51) Int Cl.7: B60G 15/14, F16F 9/084,  
F16F 9/04

(43) Date of publication A2:  
08.07.1998 Bulletin 1998/28

(21) Application number: 98300026.6

(22) Date of filing: 05.01.1998

(84) Designated Contracting States:  
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC  
NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Crabtree, Michael L.  
Arvada, Colorado 80003 (US)  
• Stieg, Richard F.  
Boulder, Colorado 80303 (US)

(30) Priority: 06.01.1997 US 779875  
26.11.1997 US 979004

(74) Representative:  
Carpmael, John William Maurice  
CARPMAELS & RANSFORD  
43 Bloomsbury Square  
London, WC1A 2RA (GB)

(54) Side load compensating airspring for a vehicle suspension and method

(57) A telescopic strut (10) for a vehicle suspension of the airspring type with a flexible sleeve (20) forming a chamber portion (A-B, A'-B') and a rolling lobe portion (B-C, B'-C'). The chamber portion is attached to a tilted closure (14) and the rolling lobe portion of the airsleeve is attached to a piston (18) that is transversely moved which introduces a shear force (FT) into the airsleeve and increases a surface area on an upward tilted side of the sleeve so as to provide side load compensation and where the axial length of the rolling lobe is substantially equalized to enhanced flexural life.

A method of imparting a side load force with an airspring fastened between a fixed member (12) and reciprocating member (16) of a vehicle suspension, is provided by tilting a closure member (14) of the airspring, transversely moving a piston (18) connected to a rolling lobe portion of the airspring while distorting a chamber portion of the airspring, and eccentrically offsetting the piston in a manner that tends to equalize an axial length of a rolling lobe.

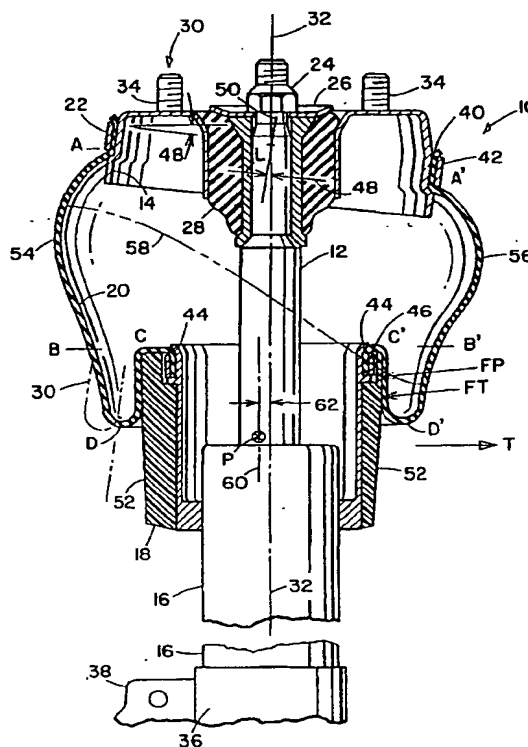


FIG. 1



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 0026

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,A	US 4 688 774 A (WARMUTH II IVAN J) 25 August 1987 (1987-08-25) * abstract; figures 3,5-7 *	1,11,16	B60G15/14 F16F9/084 F16F9/04
D,A	US 4 911 416 A (WARMUTH II IVAN J) 27 March 1990 (1990-03-27) * abstract; figure 3 *	1,11,16	
A	EP 0 395 214 A (GEN MOTORS CORP) 31 October 1990 (1990-10-31) * abstract *	1,11,16	
A	US 5 129 634 A (HARRIS JOHN R) 14 July 1992 (1992-07-14) * abstract *	1,11,16	
A	DE 40 10 982 A (VOLKSWAGENWERK AG) 31 October 1990 (1990-10-31) * abstract *	1,11,16	
D,A	US 4 763 883 A (CRABTREE MICHAEL L) 16 August 1988 (1988-08-16)		TECHNICAL FIELDS SEARCHED (Int.Cl.6)  B60G F16F
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>24 July 2000</b>	Examiner <b>Torsius, A</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 0026

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-07-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4688774 A	25-08-1987	AU 595844 B	12-04-1990
		AU 6571686 A	04-06-1987
		BR 8605730 A	18-08-1987
		CA 1287069 A	30-07-1991
		DE 3683992 A	02-04-1992
		EP 0225271 A	10-06-1987
		ES 2003530 A	01-11-1988
		IN 172011 A	13-03-1993
		JP 1883030 C	10-11-1994
		JP 6009923 B	09-02-1994
		JP 62131810 A	15-06-1987
		KR 9207838 B	18-09-1992
		MX 166180 B	23-12-1992
		US 4911416 A	27-03-1990
US 4911416 A	27-03-1990	US 4688774 A	25-08-1987
		AU 595844 B	12-04-1990
		AU 6571686 A	04-06-1987
		BR 8605730 A	18-08-1987
		CA 1287069 A	30-07-1991
		DE 3683992 A	02-04-1992
		EP 0225271 A	10-06-1987
		ES 2003530 A	01-11-1988
		IN 172011 A	13-03-1993
		JP 1883030 C	10-11-1994
		JP 6009923 B	09-02-1994
		JP 62131810 A	15-06-1987
		KR 9207838 B	18-09-1992
		MX 166180 B	23-12-1992
EP 0395214 A	31-10-1990	US 4961594 A	09-10-1990
		DE 69000410 D	03-12-1992
		DE 69000410 T	18-03-1993
US 5129634 A	14-07-1992	BR 8704450 A	19-04-1988
		CA 1320222 A	13-07-1993
		DE 3762663 D	13-06-1990
		EP 0259245 A	09-03-1988
		JP 2019997 C	19-02-1996
		JP 7051977 B	05-06-1995
		JP 63072930 A	02-04-1988
		KR 9502557 B	23-03-1995
DE 4010982 A	31-10-1990	NONE	
US 4763883 A	16-08-1988	BR 8706444 A	17-05-1988

EPO FORM P4439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 0026

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

24-07-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4763883 A		CA 1306760 A	25-08-1992
		DE 3768492 D	11-04-1991
		EP 0285726 A	12-10-1988
		JP 2087451 C	02-09-1996
		JP 7103918 B	08-11-1995
		JP 63251641 A	19-10-1988
		KR 9100129 B	21-01-1991
		MX 170817 B	20-09-1993
		US 4954194 A	04-09-1990

Walter Ottesen  
Patent Attorney  
P.O. Box 4026  
Gaithersburg, MD 20885-4026  
Telephone: 301-869-8950  
Telefax: 301-869-8929  
Attorney Docket No. 202-093  
Application Serial No. 10/693,495

EPD FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82